



Tier1
BloombergNEF

FE0C
FREE


Power the future

PERC 182 BIFACIAL

395-420W

High efficiency bifacial modules

· Full black

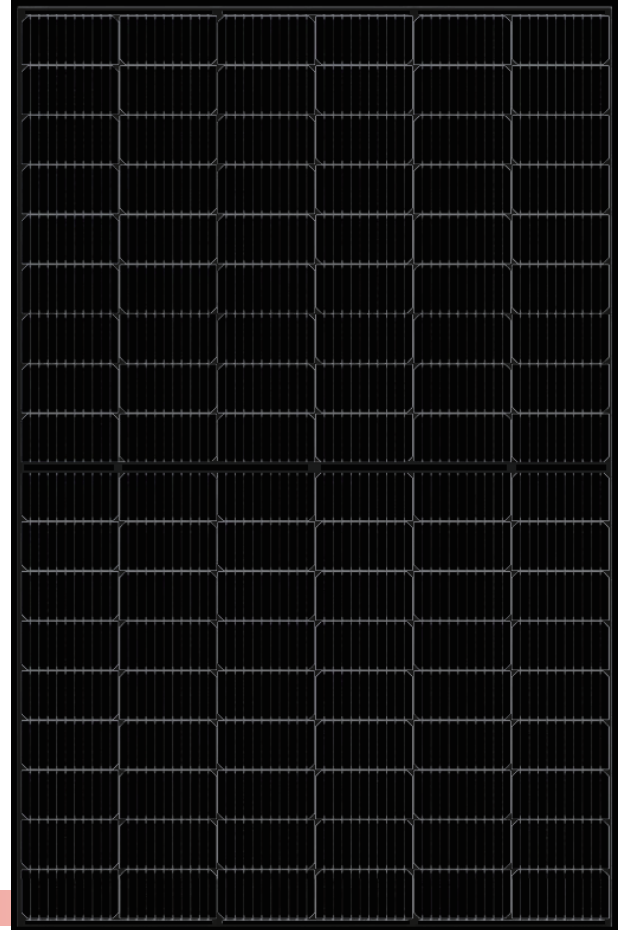

 UTILITY

 C&I

Module efficiency

21.48%



Better leveled cost of energy



Better high temperature stability




Improved low-light performance



Excellent bifacial performance

Linear performance guarantee for 25 years

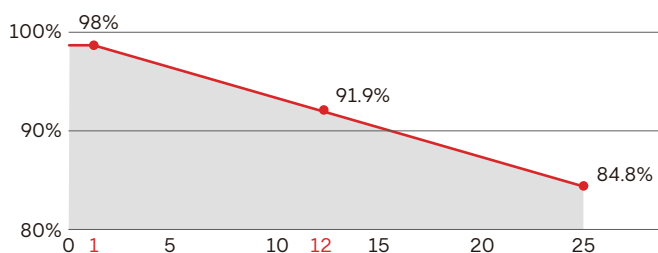

WARRANTY

Quality Guarantee **12** years

Power Warranty **25** years

CERTIFICATE



Model of modules	SP395-108M10		SP400-108M10		SP405-108M10		SP410-108M10		SP415-108M10		SP420-108M10	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	395.00	294.00	400.00	298.00	405.00	301.00	410.00	305.00	415.00	309.00	420.00	313.00
Maximum power current (Vmp)	30.62	28.30	30.83	28.40	31.04	28.60	31.25	28.80	31.47	29.00	31.69	29.20
Maximum power current (Imp)	12.90	10.40	12.98	10.46	13.05	10.52	13.12	10.58	13.19	10.65	13.26	10.71
Open circuit voltage (Voc)	36.73	34.30	36.93	34.50	37.13	34.60	37.33	34.80	37.53	35.00	37.73	35.20
Short circuit current (Isc)	13.69	11.04	13.76	11.09	13.83	11.15	13.90	11.20	13.97	11.26	14.04	11.32
Module efficiency	20.20%		20.46%		20.72%		20.97%		21.23%		21.48%	

STC (Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C,AM1.5,Wind Speed 1m/s)

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	1722×1134×30mm
Weight	20.3kg
Cell	108 cells, Mono Crystalline Silicon, 91mm×182mm-10BB
Glass	3.2mm ultra clear embossed tempered coated glass
Frame	Anodized aluminum alloy
Junction box	IP68
Output wire	4mm ²
Wire length	1100mm
Connector	MC4 Compatible
Packing Specification	36 pcs/Pallet ; 936 pcs/40' HQ


OPERATING PARAMETERS

Power tolerance (W)	(0~+5W)
Maximum system voltage (V)	1000V
Maximum rated fuse current (A)	25A
Current operating temperature (C)	-40~+85°C
Mechanical load	+5400Pa/-2400Pta



TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.048% / °C
Temp. Coeff. of Voc (TK Voc)	-0.27% / °C
Temp. Coeff. of Pmax (TK Pmax)	-0.34% / °C
Normal Operating Cell Temperature	45±2°C

MODULE DIMENSIONS(MM)

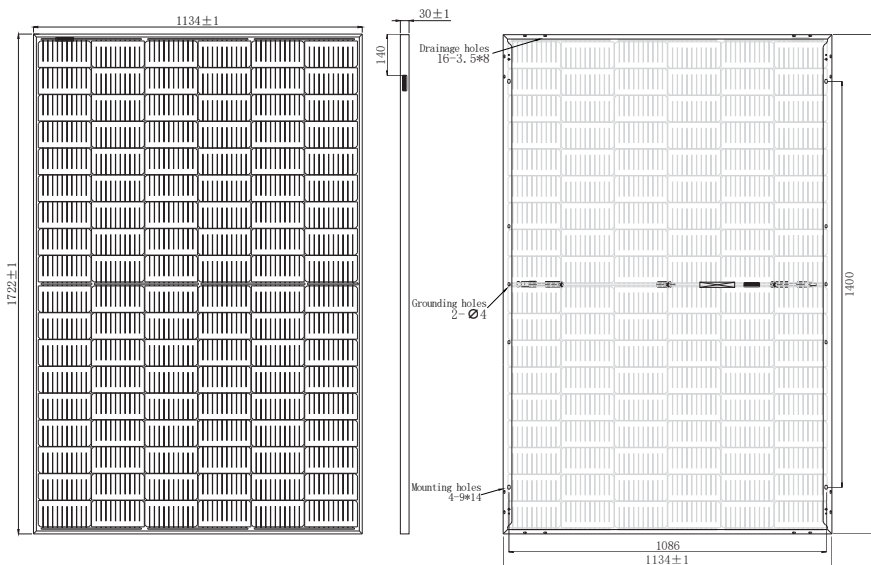

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

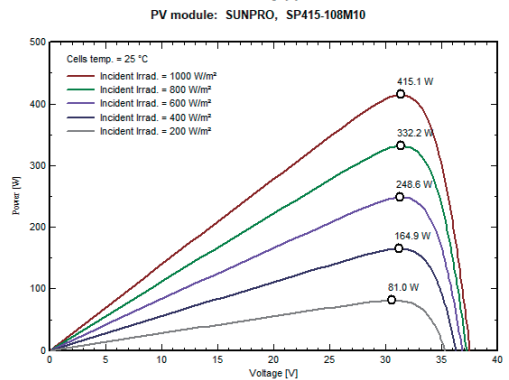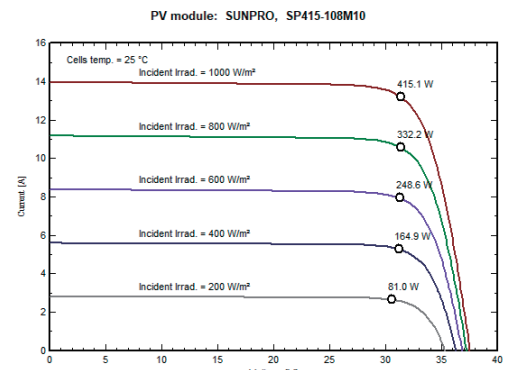

SUNPRO POWER NORTH AMERICA INC.

ADD: STE 2,206 N Randolph St, Champaign, IL 61820

E-MAIL: info@sunpropower.com WEBSITE: www.sunpropower.us

*All data may have a lag, for reference only. Sunpro has the final right of interpretation.