

ZXM7-UHLDD108 Series

SMBB HALF-CELL Black N-Type Bifacial Double Glass Monocrystalline PV Module

420-450W

POWER RANGE

23.04%

MAXIMUM EFFICIENCY

0.40%

YEARLY DEGRADATION



12 YEARS PRODUCT WARRANTY



30 YEARS OUTPUT GUARANTEE




IEC 61215/IEC 61730/IEC 61701/IEC 62716/UL 61730

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets, please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

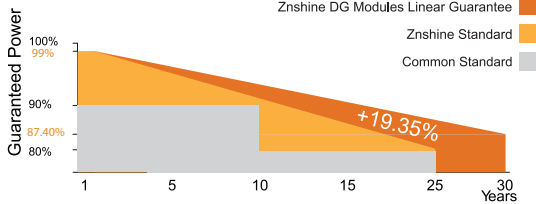

*Please check Limited Warranty for Standard PV Modules which is officially released by ZNSHINE PV-TECH Co.,Ltd.

Key Features



Excellent Cells Efficiency

SMBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity environment.



TIER 1

Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.



Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.



Bifacial Technology


Up to 25% additional power gain from back side depending on albedo.



Improved Aesthetics


Compared to conventional modules, this full black modules have a more uniform appearance and superior aesthetics.

DIMENSIONS OF PV MODULE(mm)

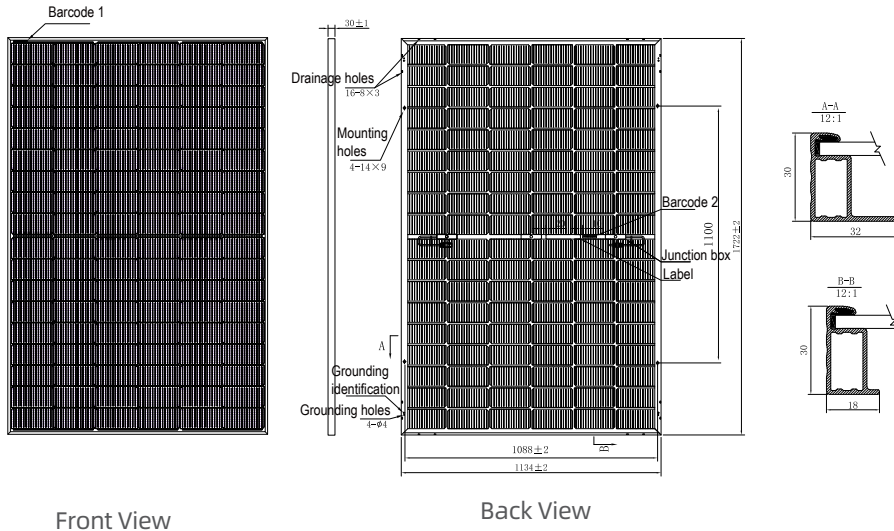


*Remark: customized frame color and cable length available upon request

I-V CURVES OF PV MODULE(430W)

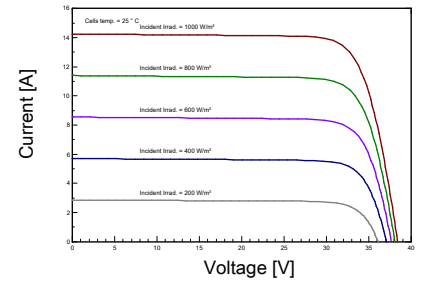

P-V CURVES OF PV MODULE(430W)

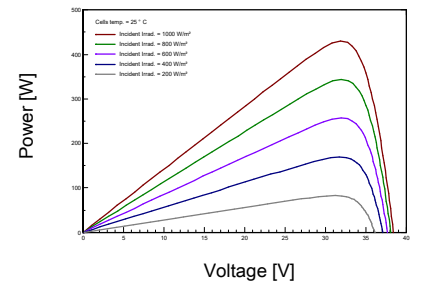

ELECTRICAL CHARACTERISTICS | STC*

Nominal Power Watt Pmax(W)*	420	425	430	435	440	445	450
Maximum Power Voltage Vmp(V)	31.50	31.70	31.90	32.10	32.30	32.50	32.70
Maximum Power Current Imp(A)	13.34	13.41	13.48	13.56	13.63	13.70	13.78
Open Circuit Voltage Voc(V)	38.00	38.20	38.40	38.60	38.80	39.00	39.20
Short Circuit Current Isc(A)	14.11	14.18	14.25	14.32	14.39	14.46	14.53
Module Efficiency (%)	21.51	21.76	22.02	22.28	22.53	22.79	23.04

*The data above is for reference only and the actual data is in accordance with the practical testing
 *STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5
 *Measuring uncertainty: ±3%, Power tolerance: ±3%
 *Electrical data in this catalog do not refer to a single module and they are not part of the offer.
 *They only serve for comparison among different module types.
 *All the electrical characteristics such as Im, Vm, Isc, Voc and FF are within ±5% tolerance.

MECHANICAL DATA

Solar cells	N-type Monocrystalline
Cells orientation	108 (6x18)
Module dimension	1722x1134x30 mm (With Frame)
Weight	24.5±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	IP 68, 3 diodes
Cables	4 mm², +300mm, -200mm or Customized Length(with connectors)
Connectors*	MCC4-EVO2 compatible

*Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT*

Maximum Power Pmax(Wp)	318.70	322.30	326.00	329.80	333.50	337.20	341.00
Maximum Power Voltage Vmp(V)	29.50	29.70	29.90	30.00	30.20	30.40	30.60
Maximum Power Current Imp(A)	10.81	10.86	10.92	10.97	11.03	11.08	11.14
Open Circuit Voltage Voc(V)	35.90	36.10	36.30	36.40	36.60	36.80	37.00
Short Circuit Current Isc(A)	11.39	11.44	11.50	11.56	11.61	11.67	11.73

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1 m/s

TEMPERATURE RATINGS

NMOT	44°C ±2°C
Temperature coefficient of Pmax	(-0.30±0.03)%/°C
Temperature coefficient of Voc	-0.25%/°C
Temperature coefficient of Isc	0.046%/°C
Refer. Bifacial Factor	(80±10)%

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	30 A
Front Side Maximum Static Loading	Up to 5400Pa
Rear Side Maximum Static Loading	Up to 2400Pa

*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection

ELECTRICAL CHARACTERISTICS (REAR POWER GAIN) *

5%	Maximum Power:Pmax(W)	441	446	452	457	462	467	473
	Module Efficiency(%)	22.58	22.85	23.12	23.39	23.66	23.93	24.20
15%	Maximum Power:Pmax(W)	483	489	495	500	506	512	518
	Module Efficiency(%)	24.73	25.03	25.32	25.62	25.91	26.21	26.50
25%	Maximum Power:Pmax(W)	525	531	538	544	550	556	563
	Module Efficiency(%)	26.89	27.21	27.53	27.85	28.17	28.49	28.81

PACKAGING CONFIGURATION *

Piece/Box	36
Piece/Container(40'HQ)	936

*Customized packaging is available upon request.
 *Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.
 They only serve for comparison among different module types.
 *Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.